




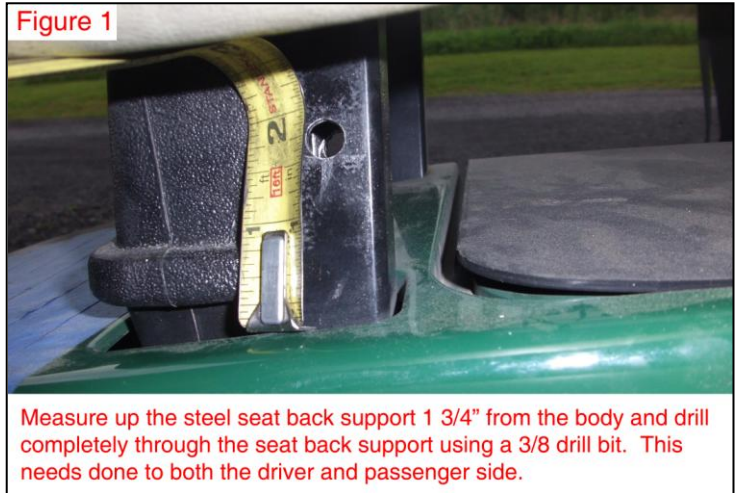
Yamaha G29 Front Seat Belt Mount Installation Instructions Part# 7444

 Always wear appropriate eye protection!



INSTALLATION INSTRUCTIONS

1. Measure 1 3/4" up on the passenger side metal seat back support from the body as shown in FIGURE 1. Using a 5/16" drill bit drill completely through the seat back support. Do the same for the driver side.
2. Using the supplied 5/16 x 2 bolts, washers & locknuts mount the seat belt mounting bracket to the holes you just drilled in the seat back supports as shown in FIGURE 2. **NOTE:** When mounting make sure the bent end mounts go towards the rear of the cart. The mounting holes are slotted to allow you to center the mounting bracket as needed.
3. Using the supplied 3/8 x 1 bolts, washers & locknuts mount the seat belts to the mounting bracket as shown in FIGURES 2 & 3.
4. Securely tighten all bolts.



Indemnification And Insurance Agreement

High Performance Enhancement Kit purchaser assumes sole and entire responsibility for, and shall indemnify and save harmless Nivel LLC, from any and all claim, liability, responsibility, and persons or property that may be sustained in connection with the use of any product before or after purchase, including but not limited to high performance enhancement lift kits. The High Performance Enhancement Kit purchaser also shall indemnify Nivel LLC harmless with respect to any and all liability that may be incurred.

Golf Cars are recommended for use only by those aged 16 and older. Golf Cars can be especially hazardous to operate. Always remember that riding and alcohol/drugs don't mix. Never ride on public roads. Never carry more than two passengers (except shuttles and trams). Never engage in stunt driving. Avoid excessive speeds and be particularly careful on difficult terrain. Nivel LLC reserves the right, at any time, to discontinue or change specifications, prices, designs, features, models, or equipment without notice and without incurring any obligation.

 Copyright Nivel LLC
All Rights Reserved