





Yamaha G29 Rear Seat Belt Mount Installation Instructions for Factory Rear Seat Part# 7446

Always wear appropriate eye protection!



INSTALLATION INSTRUCTIONS

- Using the supplied 3/8x1 bolts, washers and locknuts mount the female end seat belt mounting bracket to the main seat belt bracket using the supplied 3/8x1 bolts washers and locknuts as shown.
NOTE: The female end bracket mounts to the front side of the main bracket, with the bend in the main bracket down and the male seat belt end mounting tabs back as shown.
- Remove the factory rear seat backs from the rear seat. Save the hardware for reinstallation.
- Clamp the main seat belt bracket to the back side of the rear seat back supports. **NOTE:** Make sure the bend on the seat belt bracket goes down and towards the front of the car. The top of the seat belt bracket should be 4 1/2" to the center hole of the seat back holes as shown on both sides of the cart.
- Using a 5/16" drill bit drill through the hole in the seat belt bracket and completely through the rear seat back supports.
- Using the supplied 5/16 x 2 bolts, washers & locknuts mount the seat belt bracket to the holes you just drilled in the seat back supports. **NOTE:** Make sure the bend on the seat belt bracket goes down and towards the front of the car.
- Using the supplied 3/8 x 1 bolts, washers & locknuts mount the male end seat belts to the mounting bracket. Make sure when mounting the male ends they are slightly angled up to keep from interfering with the rear seat bottom.
- Securely tighten all bolts.
- Reinstall factory rear seat backs using stock hardware.

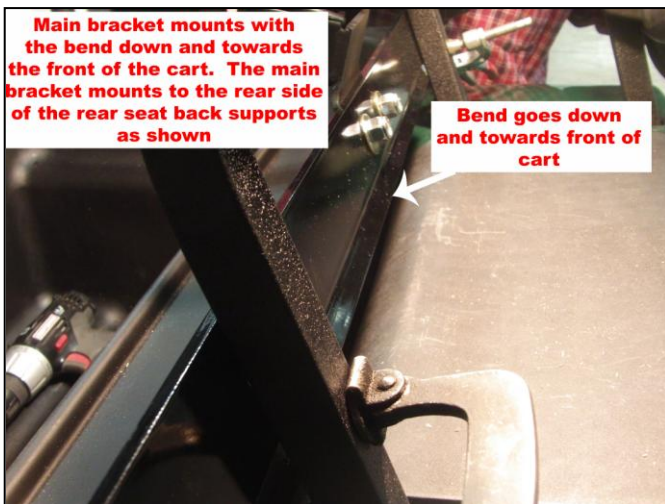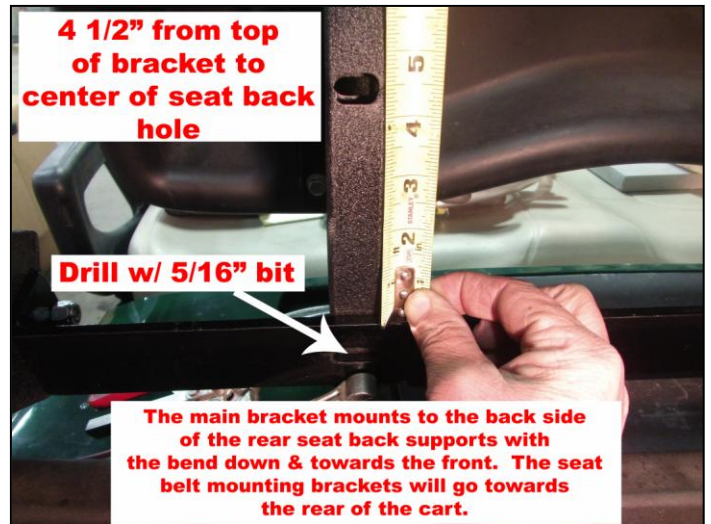

Indemnification And Insurance Agreement
High Performance Enhancement Kit purchaser assumes sole and entire responsibility for, and shall indemnify and save harmless Nivel LLC from any and all claim, liability, responsibility, and persons or property that may be sustained in connection with the use of any product before or after purchase, including but not limited to high performance enhancement lift kits. The High Performance Enhancement Kit purchaser also shall indemnify Nivel LLC harmless with respect to any and all liability that may be incurred.
Golf Cars are recommended for use only by those aged 16 and older. Golf Cars can be especially hazardous to operate. Always remember that riding and alcohol/drugs don't mix. Never ride on public roads. Never carry more than two passengers (except shuttles and trams). Never engage in stunt driving. Avoid excessive speeds and be particularly careful on difficult terrain. Nivel LLC reserves the right, at any time, to discontinue or change specifications, prices, designs, features, models, or equipment without notice and without incurring any obligation.