

**Club Car DS Sport Windshield
Installation Instructions
Part# 28032**



Hardware Kit

1-Windshield & Frame

2- 5/16 x 1 bolts

2- 5/16 x 1 1/2 button head bolts

6- 5/16 flat washers


2-5/16 locknuts



*Always wear appropriate
eye protection!*

Installation Instructions:

1. If you have a roof on your cart, remove roof from the cart. When installing the sport windshield you can re-use your stock roof mount hardware or replace it with the supplied hardware. Carts without tops will require complete use of supplied hardware kit.
2. Using the supplied 5/16 x 1 bolts and washers loosely mount the windshield frame to where the roof mounted to the body on both sides of the cart as shown in Figure 1.
3. Using the supplied 5/16 x 1 1/2 button head bolts, washers, & locknuts loosely mount the windshield frame to the cart through the aluminum dash trim, to both sides of the cart as shown in Figure 2.
****NOTE-the stock aluminum dash trim holes may need to be slightly enlarged on some models.****
4. Securely tighten all bolts.

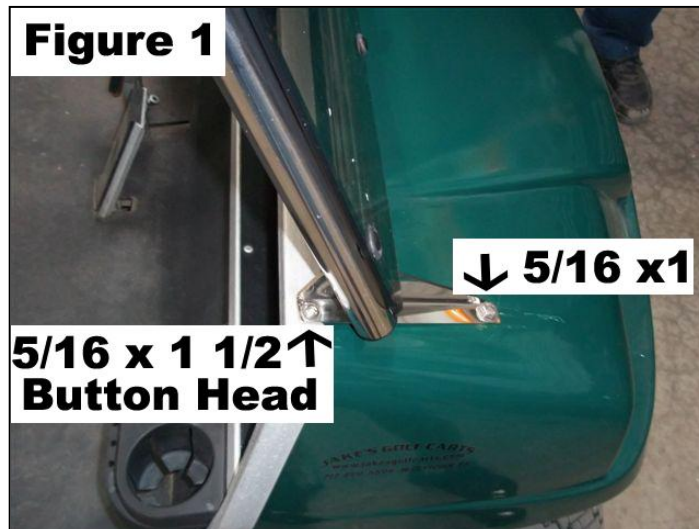

866-405-2537

www.jakesliftkits.com